


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 28 TOWNSHIP 17 RANGE 4  
DATE: --7-19-99- 10-09-04  
PARTY CHIEF: -Kiste- Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 3-4-92

IN. S.P.C. E ZONE, NAD 83  
NAME: 17042804  
N: 515437.5130(m)  
E: 63901.1810(m)

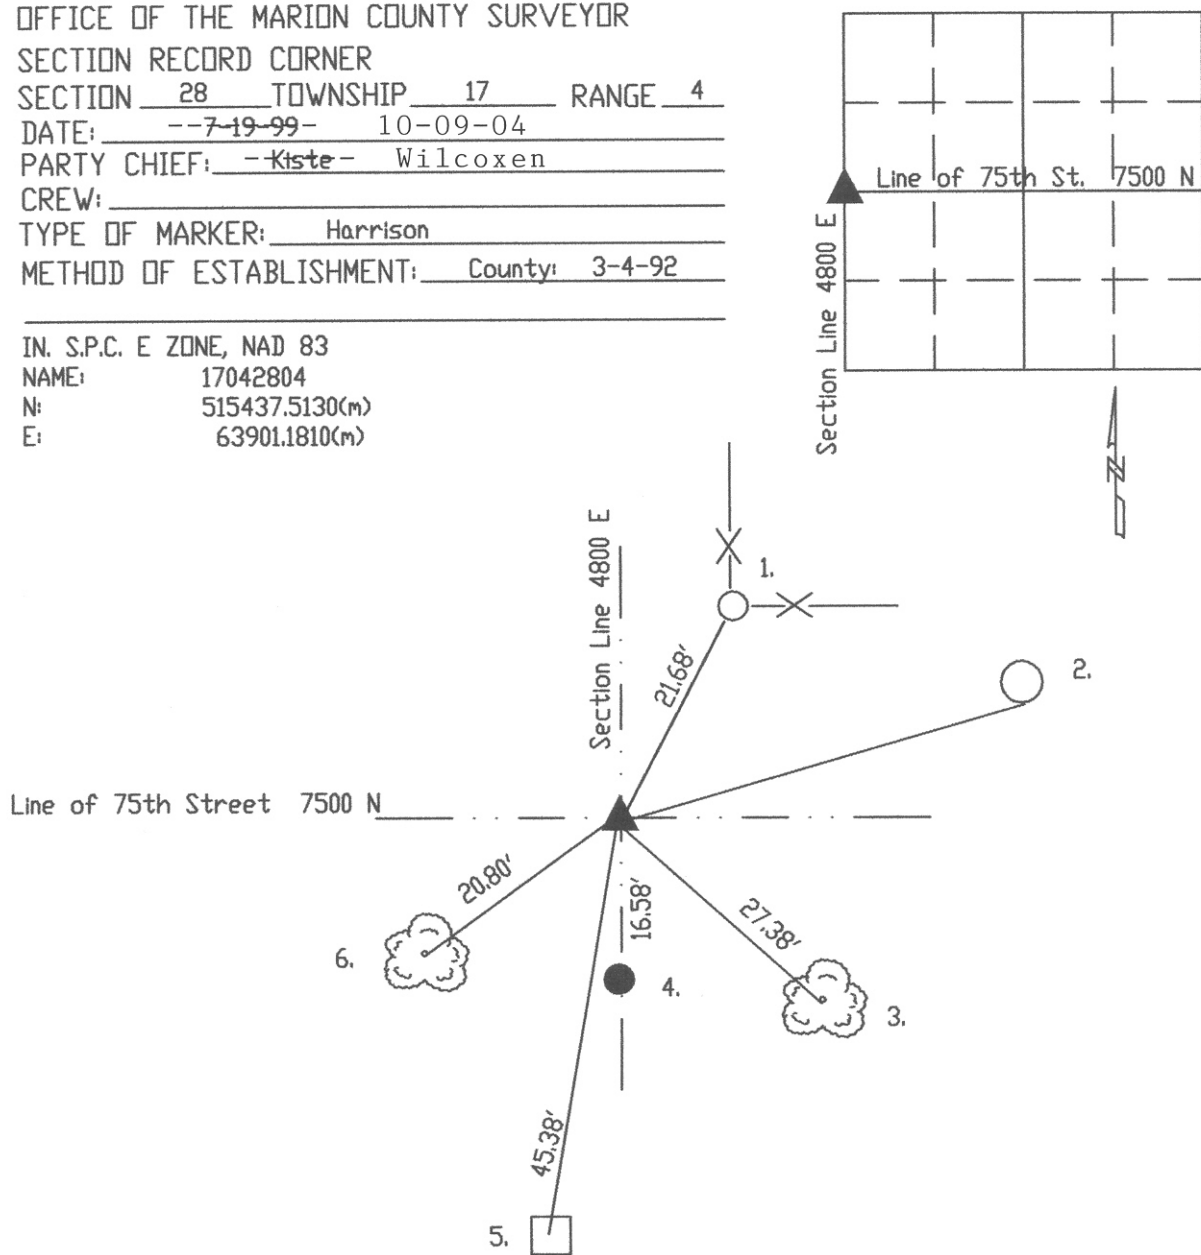

Original post set 1821 by Wm. B. Laughlin with witnesses: 10' beech S 59 E 4 links, 12' ash S 82 W 9 links per Marion County Atlas pg. 12. Survey by H.B. Fatout 8-24-1880 called no monument, but with witness: 23' sugar N 1 1/4 W 71 links, 24' oak S 60 1/2 W 52 1/2 links per Washington Township Legal Survey Book pg. 81. Dial Haskett 3-6-72 called a hinge nail replaced with a 12' bolt. Wilcoxon 8-27-86 called PK nail at surface over large road nail 4' down. Kiste excavated 3-4-92 and PK nail was found at surface. A large road nail was found 4' down. A 12' bolt spike was found 8' down. Harrison set. Re-tied 7-19-99 by Kiste.

HC742804

REF.	DISTANCE	DESCRIPTION
1.	21.68'	Face of steel corner fence post for Cemetery
2.	41.86'	PK nail S PwP#10-243 12'up
3.	27.38'	Mag nai. w/MCS brass washer SW 8' sugar 3'up
4.	16.58'	Due S to 1' rebar
5.	45.38'	4'x4' concrete monument
6.	20.80'	Mag nail w/MCS brass washer NW 12' sugar 6'up